

# FELICE BLADE FX SERIES

## Emergency LED Exit Blade




### Key Features

- Double sided
- 30m viewing distance
- Maintained or non maintained as standard
- Surface or recessed mounting (recessing kit available)
- Self-test ready, activated by Programmer Remote\*
- Pre-commissioning feature
- Integrated test button
- 5 year warranty (T's & C's apply)
- UK Support

### Options & Accessories

Recess kit	/FEL-BLA-REC-KIT-FX
Suspension Kit	/FEL-SUSKIT-FX
DALI	/DALI
White body	/WHI
Black body	/BLK

Programmer remote\*      REM-FX-E1

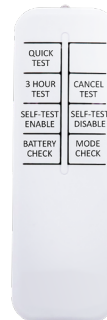


\* Self-test luminaires are configured to manual test mode by default. If self-test mode is required, it should be activated via remote control.



Self-test luminaires are configured to manual test mode by default. If self-test mode is required, it should be activated via remote control.

### Technical Drawing

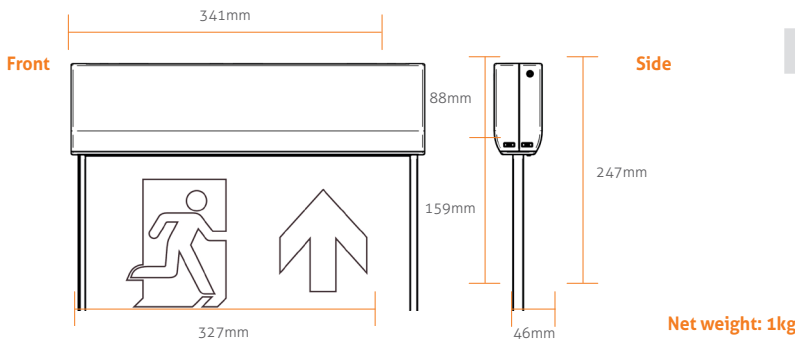

### Part Codes

Part Code	Description	NM Watts	M Watts
FEL-SUR-BLA-5-AU-WHI-FX-STEMP	Felice Surface EM Blade ARROW UP 5w 30m Viewing Distance IP20 +Self Test EM Programmable <b>White</b>	0.5	5
FEL-SUR-BLA-5-AU-BLK-FX-STEMP	As above, <b>Black</b>	0.5	5
FEL-BLA-AL/AR-LEGKIT-FX	Felice Blade Interchangeable ARROW L&R Legend Kit for FEL-BLA FX		
FEL-BLA-AD-LEGKIT-FX	Felice Blade Interchangeable ARROW DOWN Legend Kit for FEL-BLA FX		

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



### Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.