

VIVO FX SERIES

Surface Bulkhead



Features & Highlights

- IP65 ingress protection
- IK10 impact protection
- Self-test ready, activated by Programmer Remote*
- 20mm conduit entry. IP65 cable gland included
- Available as maintained or non maintained
- 5 year warranty (T's & C's apply)
- UK support


Options & Accessories

Non-maintained	/NM
Maintained	/M
DALI	/DALI
Non-maintained, wireless self-test	/LMEM/NM
Recessing Kit	/RECKIT
Programmer remote*	REM-FX-E1




Self-test luminaires are configured to manual test mode by default. If self-test mode is required, it should be activated via remote control.

Dimensions & Weight

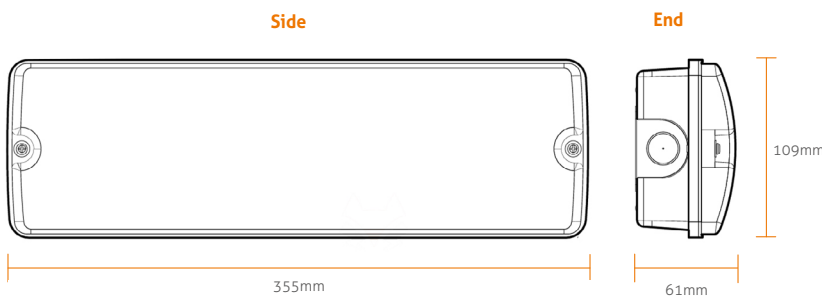

Net Weight 0.8kg

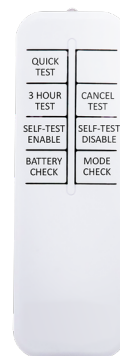

* Self-test luminaires are configured to manual test mode by default. If self-test mode is required, it should be activated via remote control.

Part Codes

Part Code	Description	Circuit Watts (charging)	Luminaire Lumens	Colour Temp
VIV-SUR-5-200-WHI-FX-STEMP	Vivo Surface EM Bulkhead 5w ~200Lm ~20M Viewing Distance 108x100Degree Optic CRI80 4000K IP65 White +SelfTest Programmable EM	5	200	840
VIV-SUR-5-325-WHI-FX-STEMP	As Above, ~325Lm	5	325	840
VIV-SUR-5-800-WHI-FX-STEMP	As Above, ~800Lm	5	800	840

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.